



The  
Patent  
Office

PCT/GB 00 / 00 70 3  
28 FEBRUARY 2000  
09/914212

INVESTOR IN PEOPLE

AD00 / 703

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D	27 MAR 2000
WIPO	

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*P. Mahoney*

Dated


14th March 2000



**Request for grant of a patent**

*(The notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

29 OCT 1999

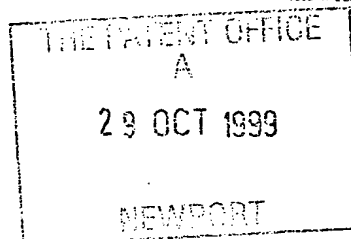

The Patent Office

Cardiff Road  
Newport

Gwent NP9 1RH

1. Your reference

SMC 60401

2. Patent application number

*(The Patent Office will fill in this part)*

**9925515.0**

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

Avecia Limited  
Hexagon House  
Blackley  
Manchester M9 8ZS

Patents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

COMPOSITION

5. Name of your agent *(if you have one)*

SCHMITT, Maja

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

Avecia Limited, P.O. Box 42  
Hexagon House  
Blackley  
Manchester, M9 8ZS  
United Kingdom

Patents ADP number *(if you know it)*

7742125001 X

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*

Date of filing  
*(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

a) *any applicant named in part 3 is not an inventor, or*

b) *there is an inventor who is not named as an applicant, or*

c) *any named applicant is a corporate body.*

*See note (d))*

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

24

Claim(s)

02

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*G. Terry*

Date 28/10/99

Avecia Limited Authorised Signatory

12. Name and daytime telephone number of person to contact in the United Kingdom

K.M. Pinder/G. Terry 0161 721 1361/2

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SMC 60401

APPLICANTS

Avecia Limited

TITLE

Compositions



5

COMPOSITIONS

The invention relates to compositions containing pigments and to their use in inks for ink-jet printing.

Ink-jet printing involves printing an image onto a substrate using ink droplets ejected through a fine nozzle onto a substrate without bringing the fine nozzle into contact with the substrate.

There are many demanding performance requirements for colorants and inks used in ink-jet printing. For example they desirably provide sharp, non-feathered images having good water-fastness, light-fastness and optical density. The inks are often required to dry quickly when applied to a substrate to prevent smudging, but they should not form a crust which would block the tip of the fine nozzle. The inks should also be stable to storage over time without decomposing or forming a precipitate which could also block the fine nozzle.

Thermal and piezoelectric ink-jet printers are widely used, thus there is a need for inks, suitable for use in both types of printers, having high colour strength and giving images having a high light-fastness and water-fastness when printed on a typical substrate, especially plain paper.

It has now been found that certain combinations of a pigment with a low molecular weight hydrophilic polymer and a high molecular weight hydrophobic polymer in a liquid medium results in a composition which is suitable as an ink for use in thermal and piezo ink-jet printers.

Thus, according to the present invention there is provided a composition comprising the components:

- (a) a hydrophilic polymer having a number average molecular weight less than 30,000;
- (b) a hydrophobic polymer having a number average molecular weight more than 40,000;
- (c) pigment; and
- (d) liquid medium.

The number average molecular weight ( $M_n$ ) for components (a) and (b) may be measured by any of the well known techniques, preferably by gel permeation chromatography ("gpc"). The gpc method used for determining  $M_n$  preferably comprises applying the polymer to a chromatography column packed with cross-linked polystyrene/divinyl benzene, eluting the column with tetrahydrofuran at a temperature of 40°C and assessing the  $M_n$  of the polymer compared to a number of a polystyrene standards of a known  $M_n$ . Suitable cross-linked polystyrene/divinyl benzene chromatography columns are commercially available from Polymer Laboratories.

As an alternative to the gpc method for determining Mn one may use other methods, for example multi-angle light scattering.

Preferably the Mn of component (a) is less than 20,000, more preferably less than 12,500 and especially less than 10,000. Preferably the Mn of component (a) is more than 500. Preferably the Mn of component (b) is more than 60,000. Preferably the Mn of component (b) is less than 10 million, more preferably less than 2 million.

The hydrophilic and hydrophobic polymers may each independently be homopolymers or copolymers.

Component (a) is preferably hydrophilic by virtue of the presence of ionic and/or non-ionic water dispersing groups in the hydrophilic polymer. The hydrophilic polymer is preferably prepared by polymerising one or more monomers having water-dispersing groups, optionally with one or more monomers which are free from water-dispersing groups. The nature and level of water-dispersing groups in the polymer influences whether a solution, dispersion, emulsion or suspension is formed on dissipation of the hydrophilic polymer in aqueous media. Preferably the level of monomers having water-dispersing groups is from 5 to 80% by weight of the hydrophilic polymer. Preferably the level of monomers having water-dispersing groups is at least 5% by weight greater in the hydrophilic polymer than the level of monomers having water-dispersing groups in the hydrophobic polymer. For example, if the level of monomers having water-dispersing groups is 5% by weight of the hydrophobic polymer then the level of monomers having water-dispersing groups in the hydrophilic polymer is preferably at least 10% by weight of the hydrophilic polymer. More preferably the level of monomers having water-dispersing groups is at least 10% by weight greater in the hydrophilic polymer than the level of monomers having water-dispersing groups in the hydrophobic polymer. Preferably a solution is formed on dissipation of the hydrophilic polymer in water, although a minor amount of the hydrophilic polymer may be insoluble in water and exist as dissipated particles when mixed with aqueous media or water.

Water-dispersing groups are preferably pendant to the main polymer backbone. Preferred ionic water-dispersing groups are anionic water-dispersing groups, especially carboxylic, phosphonic and or sulphonic acid groups. Preferred non-ionic water-dispersing groups are polyoxyalkylene groups, more preferably polyoxyethylene groups.

A small segment of the polyoxyethylene group can be replaced by a oxypropylene segment and/or oxybutylene segment, however the polyoxyethylene group should still contain oxyethylene as a major component. When the water-dispersing groups in the hydrophilic polymer are predominantly polyoxyethylene groups, the polyoxyethylene group content preferably does not exceed 25% by weight, more preferably does not exceed 15% by weight, based on the total weight of the hydrophilic polymer.



The anionic water-dispersing groups are preferably fully or partially in the form of a salt. Conversion to the salt form is optionally effected by neutralisation of the polymer with a base, preferably during the preparation of the hydrophilic polymer and/or during the preparation of the composition of the present invention. If anionic water-dispersing groups are used in combination with a non-ionic water-dispersing group, neutralisation may not be required.

Preferably the base used to neutralise any anionic water-dispersing groups is ammonia, an amine or an inorganic base. Suitable amines include tertiary amines, for example triethylamine or triethanolamine. Suitable inorganic bases include alkaline hydroxides and carbonates, for example lithium hydroxide, sodium hydroxide, or potassium hydroxide. A quaternary ammonium hydroxide, for example  $N^+(CH_3)_4OH^-$ , can also be used. Generally a base is used which gives the required counter ion desired for the composition. For example, preferred counter ions include  $Li^+$ ,  $Na^+$ ,  $K^+$ ,  $NH_4^+$  and substituted ammonium salts.

Component (a) is preferably a hydrophilic acrylic, polyurethane or polyester polymer, more preferably a hydrophilic acrylic or polyurethane polymer, especially a hydrophilic polyurethane polymer.

When component (a) is a hydrophilic acrylic polymer it preferably has a glass transition temperature ( $T_g$ ) greater than  $-10^\circ C$  and more preferably from  $20^\circ C$  to  $120^\circ C$ .  $T_g$  is the temperature at which the polymer changes from a glassy, brittle state to a plastic, rubbery state, and may be measured by differential scanning calorimetry.

When component (a) is a hydrophilic acrylic polymer it preferably has an acid value from 30 to 200mgKOH/g, more preferably from 30 to 150mgKOH/g and especially from 40 to 100mgKOH/g.

The hydrophilic acrylic polymer has preferably been obtained from the polymerisation of one or more olefinically unsaturated monomers having ionic and/or non-ionic water-dispersing groups, optionally in the presence of one or more olefinically unsaturated monomers which are free from ionic and non-ionic water-dispersing groups.

Preferred olefinically unsaturated monomers having ionic water-dispersing groups include but are not limited to acrylic acid, methacrylic acid, itaconic acid,  $\beta$ -carboxy ethyl acrylate, maleic acid, monoalkyl itaconates (for example, monomethyl maleate, monoethyl maleate, monobutyl maleate and monooctyl maleate), citraconic acid, styrenesulfonic acid, vinylbenzylsulfonic acid, vinylsulfonic acid, acryloyloxyalkyl sulfonic acids (for example, acryloyloxymethyl sulfonic acid, acryloyloxyethyl sulfonic acid, acryloyloxypropyl sulfonic acid and acryloyloxybutyl sulfonic acid), methacryloyloxymethyl sulfonic acid, methacryloyloxyethyl sulfonic acid, methacryloyloxypropyl sulfonic acid and methacryloyloxybutyl sulfonic acid), 2-acrylamido-2-alkylalkane sulfonic acids (for example, 2-acrylamido-2-methylethanesulfonic acid, 2-acrylamido-2-

methylpropanesulfonic acid and 2-acrylamido-2-methylbutane sulfonic acid), 2-methacrylamido-2-alkylalkane sulfonic acids (for example, 2-methacrylamido-2-methylethanesulfonic acid, 2-methacrylamido-2-methylpropanesulfonic acid and 2-methacrylamido-2-methylbutanesulfonic acid), mono(acryloyloxyalkyl)phosphates (for example, mono(acryloyloxyethyl)phosphate and mono(3-acryloyloxypropyl)phosphates) and mono(methacryloyloxyalkyl)phosphates (for example, mono(methacryloyloxyethyl)phosphate and mono(3-methacryloyloxypropyl)phosphate).

Especially preferred olefinically unsaturated monomers having ionic water-dispersing groups include acrylic acid, methacrylic acid, itaconic acid,  $\beta$ -carboxy ethyl acrylate, and / or maleic acid.

Preferred olefinically unsaturated monomers having non-ionic water-dispersing groups include alkoxy polyethylene glycol (meth)acrylates, preferably having a Mn of from 350 to 2000. Examples of such monomers which are commercially available include  $\omega$ -methoxypolyethylene glycol acrylate.

Preferred olefinically unsaturated monomers which are free from ionic or non-ionic water-dispersing groups include alkyl(meth)acrylates, optionally substituted styrenes, methacrylamides, pyrrolidones, and allyl compounds.

Preferred alkyl(meth)acrylates contain less than twenty carbon atoms. Examples include methyl acrylate, ethyl acrylate, n-propyl acrylate, isopropyl acrylate, n-butyl acrylate, isobutyl acrylate, sec-butyl acrylate, amyl acrylate, hexyl acrylate, 2-ethylhexyl acrylate, octyl acrylate, tert-octyl acrylate, 2-phenoxyethyl acrylate, 2-chloroethyl acrylate, 2-bromoethyl acrylate, 4-chlorobutyl acrylate, cyanoethyl acrylate, 2-acetoxyethyl acrylate, dimethylaminoethyl acrylate, benzyl acrylate, methoxybenzyl acrylate, 2-chlorocyclohexyl acrylate, acrylate, acetoacetate, cyclohexyl acrylate, furfuryl acrylate, tetrahydrofurfuryl acrylate, phenyl acrylate, 5-hydroxypentyl acrylate, 2,2-dimethyl-3-hydroxypropyl acrylate, 2-methoxyethyl acrylate, 3-methoxybutyl acrylate, 2-ethoxyethyl acrylate, 2-iso-propoxyethyl acrylate, 2-butoxyethyl acrylate, 2-(2-methoxyethoxy)ethyl acrylate, 2-(2-butoxyethoxy)ethyl acrylate, 1-bromo-2-methoxyethyl acrylate, 1,1-dichloro-2-ethoxyethyl acrylate, methyl methacrylate, ethyl methacrylate, hydroxyethyl methacrylate, n-propyl methacrylate, isopropyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, sec-butyl methacrylate, amyl methacrylate, hexyl methacrylate, cyclohexyl methacrylate, benzylmethacrylate, chlorobenzyl methacrylate, octyl methacrylate, N-ethyl-N-phenylaminoethyl methacrylate, 2-(3-phenylpropyloxy)ethyl methacrylate, dimethylaminophenoxyethyl methacrylate and furfuryl methacrylate. Aromatic examples include but are not limited to 4-alkyl phenylacrylate or methacrylate, phenyl methacrylate, phenyl acrylate, and  $\beta$ -naphthyl methacrylate,

Preferred optionally substituted styrenes include styrene, methylstyrene, dimethylstyrene, trimethylstyrene, ethylstyrene, diethylstyrene, isopropylstyrene,

butylstyrene, hexylstyrene, cyclohexylstyrene, decylstyrene, chloromethylstyrene, trifluoromethylstyrene, ethoxymethylstyrene, acetoxymethylstyrene, methoxystyrene, 4-methoxy-3-methylstyrene, dimethoxystyrene, chlorostyrene, dichlorostyrene, trichlorostyrene, tetrachlorostyrene, pentachlorostyrene, bromostyrene, dibromostyrene, iodostyrene, trifluorostyrene and 2-bromo-4-tri-fluoromethylstyrene.

Preferred methacrylamides contain less than 12 carbon atoms. Examples include methylmethacrylamide, tert-butylmethacrylamide, tert-octylmethacrylamide, benzylmethacrylamide, cyclohexylmethacrylamide, phenylmethacrylamide, dimethylmethacrylamide, dipropylmethacrylamide, hydroxyethyl-N-methylmethacrylamide, N-methylphenylmethacrylamide, N-ethyl-N-phenylmethacrylamide and methacrylhydrazine.

Preferred allyl compounds include allyl acetate, allyl caprylate, allyl caprylate, allyl laurate, allyl palmitate, allyl stearate, allyl benzoate, allyl acetoacetate, allyl lactate, allyloxyethanol, allyl butyl ether and allyl phenyl ether.

The hydrophilic acrylic polymer may be prepared in a conventional manner by polymerising the olefinically unsaturated monomers having ionic and/or non-ionic water-dispersing groups, optionally in the presence of olefinically unsaturated monomers which are free from ionic and non-ionic water-dispersing groups. Temperatures from 20°C to 180°C are preferred. The polymerisation may be continued until reaction between the monomers is complete or the desired Mn has been reached.

Preferred polymerisation methods include solution polymerisation, emulsion polymerisation, suspension polymerisation and solution/dispersion polymerisation and such general methods as are well known in the art.

If desired, an initiator may be used to assist acrylic polymer formation. Suitable initiators include free-radical generators. Examples of initiators include azobis compounds, peroxides, hydroperoxides, redox catalysts, potassium persulfate, ammonium persulfate, tert-butyl peroctoate, benzoyl peroxide, isopropyl percarbonate, 2,4-dichlorobenzoyl peroxide, methyl ethyl ketone peroxide, cumene hydroperoxide, dicumyl peroxide, azobisisobutyronitrile, azobis(2-amidino-propane)hydrochloride and the like. Typically 0.05 to 5% by weight of initiator is used relative to the total weight of the monomers. Preferably the polymerisation is performed in the presence of an emulsifying agent.

Optionally the hydrophilic acrylic polymer is prepared by a process in which the Mn is controlled by the addition of chain transfer agents and/or through the adjustment of the ratio of the concentration of monomers relative to the concentration of initiator during the course of the polymerisation. Typical chain transfer agents are thiols, halocarbons and cobalt macrocycles.

When component (a) is a hydrophilic polyurethane the Mn is preferably less than 12,500, more preferably less than 10,000, especially less than 7,500 and more especially less than 5,000. When component (a) is a hydrophilic polyurethane the Mn is preferably more than 500. Preferred hydrophilic polyurethanes are linear.

5 The hydrophilic polyurethane is preferably obtained from the reaction of at least one organic polyisocyanate and at least one isocyanate-reactive compound having ionic and/or non-ionic water-dispersing groups, optionally in the presence of isocyanate-reactive compounds which are free from ionic and non-ionic water-dispersing groups.

10 The organic polyisocyanate may be any known in the art, preferably having two isocyanate groups, and may for example be an aliphatic, cycloaliphatic, aromatic or araliphatic isocyanate. Examples of suitable organic polyisocyanates include ethylene diisocyanate, 1,6-hexamethylene diisocyanate, isophorone diisocyanate, tetramethylxylene diisocyanate, 1,4-phenylene diisocyanate, 2,4-toluene diisocyanate, 2,6-toluene diisocyanate, 4,4'-diphenyl-methane diisocyanate and its hydrogenated  
15 derivative, 2,4'-diphenylmethane diisocyanate and its hydrogenated derivative, and 1,5-naphthylene diisocyanate. Mixtures of the polyisocyanates can be used, particularly isomeric mixtures of the toluene diisocyanates or isomeric mixtures of the diphenylmethane diisocyanates (or their hydrogenated derivatives), and also organic polyisocyanates which have been modified by the introduction of urethane, allophanate,  
20 urea, biuret, carbodiimide, uretonimine or isocyanurate residues.

Preferred organic polyisocyanates include cycloaliphatic polyisocyanates, especially isophorone diisocyanate, and aliphatic isocyanates, especially 1,6-hexamethylene diisocyanate or hydrogenated 4,4'-diphenyl methyl diisocyanate.

25 The isocyanate-reactive compound preferably has at least one, more preferably two, isocyanate-reactive groups. Optionally isocyanate-reactive compounds having three isocyanate-reactive groups may be present, preferably in low levels not exceeding 5% by weight relative to the total weight of the isocyanate-reactive compound. Preferred isocyanate-reactive groups are selected from -OH, -NH<sub>2</sub>, -NH- and -SH. These isocyanate-reactive groups are capable of reacting with an isocyanate (-NCO) group.

30 Preferred isocyanate-reactive compounds having water-dispersing groups include low molecular weight polyols or polyamines bearing ionic and/or non-ionic water-dispersing groups. Preferred isocyanate-reactive compounds having anionic water-dispersing groups are diols having one or more sulphonic acid groups and/or carboxylic acid groups, more preferably dihydroxy alkanoic acids, especially 2,2-dimethylol propionic acid. Preferred isocyanate-reactive compounds having non-ionic water-dispersing groups  
35 are diols providing polyoxyethylene groups.

Preferred isocyanate-reactive compounds which are free from ionic and non-ionic water-dispersing groups include organic polyol(s) and / or polyamine(s). Preferred organic

polyols or polyamines have a Mn up to 3000, more preferably up to 2000, especially from 400 to 2000. Preferred organic polyols are diols. The diols include members of any of the chemical classes of diols used or proposed to be used in polyurethane formulations. In particular, the diols are preferably polyesters, polyesteramides, polyethers (other than ones providing polyoxyethylene groups), polythioethers, polycarbonates, polyacetals, polyolefins or polysiloxanes. Further examples of optional diols which are free from ionic and non-ionic water-dispersing groups include organic diols having an Mn below 400. Examples of such diols include ethylene glycol, diethylene glycol, tetraethylene glycol, bis(hydroxyethyl) terephthalate, cyclohexane dimethanol, and furan dimethanol.

The hydrophilic polyurethane may be prepared in a conventional manner by reacting one or more organic polyisocyanates with one or more isocyanate-reactive compounds. Substantially anhydrous conditions are preferred. Temperatures of from 30°C to 130°C are preferred and the reaction is preferably continued until the reaction between the organic polyisocyanates and the isocyanate-reactive compounds is substantially complete.

The relative amounts of the organic polyisocyanate and the isocyanate-reactive compounds are preferably selected such that the mole ratio of isocyanate groups to isocyanate-reactive groups is about 2:1 to 1:2, preferably from about 1.4:1 to 1:1.4. Alternatively an isocyanate-group terminated polyurethane prepolymer may be prepared in a two stage process either in solvent or as a melt, wherein the ratio of isocyanate groups to isocyanate-reactive groups is from about 1.1:1 to 2:1, preferably from about 1.1:1 to 1.9:1.

Terminating compounds, for example compounds having one isocyanate group or one isocyanate-reactive group, may be used to cap-off any excess isocyanate or isocyanate-reactive end groups in the polyurethane resulting from the reaction of the organic polyisocyanate and isocyanate-reactive compound. Compounds having one isocyanate-reactive group include, for example, monoalcohols, monoamines and monothiols, especially isopropanol. Compounds having one isocyanate reactive group include alkyl monoisocyanates. The Mn of the polyurethane may be controlled through the use of such terminating compounds. The terminating compounds may also bear ionic and/or non-ionic water-dispersing groups, for example the groups hereinbefore described.

If desired a catalyst may be used to assist formation of the hydrophilic polyurethane. Suitable catalysts include di-butyl tin dilaurate, stannous octoate and tertiary amines as known in the art.

Preferably the hydrophilic polyurethane is not prepared by chain-extension of an isocyanate-terminated polyurethane prepolymer (for example by mixing the hydrophilic polyurethane with water or water mixed with chain-extenders).

When component (a) is a hydrophilic polyester polymer, the Mn is preferably in the range from more than 500 to less than 30,000, more preferably in the range from 1000 to 25,000.

5 The Tg of the hydrophilic polyester is preferably in the range of from -38°C to 105°C.

The hydrophilic polyester is preferably obtained by polymerising at least one monomer having two or more functional groups which will readily undergo an ester condensation reaction and having ionic and/or non-ionic water-dispersing groups, optionally in the presence of monomers having two or more functional groups which will  
10 readily undergo an ester condensation reaction which are free from ionic and non-ionic water-dispersing groups. Preferred anionic water-dispersing groups are as mentioned above, especially sulphonic acid groups, ionised sulphonate groups and carboxylic acid groups and ionised carboxyl groups.

Functional groups which will readily undergo an ester condensation reaction  
15 include carboxyl groups, hydroxyl groups and esterifiable derivatives thereof. Examples of such monomers are aromatic dicarboxylic acids having an ionised sulphonate group. Particularly preferred is sodio-5-sulphoisophthalic acid (SSIPa).

Other useful monomers which have two or more groups which readily undergo an ester condensation reaction and have one or more sulphonate groups are dihydroxy aryl  
20 monomers having at least one sulphonate group.

The amount of water-dispersing groups, for example ionised sulphonate and/or carboxy and/or non-ionic water-dispersing groups, present in the hydrophilic polyester is preferably sufficient to provide water-dissipatability of the polyester. Ionised sulphonate groups are more effective at providing or contributing to water-dissipatability than ionised  
25 carboxy groups and so can be used at considerably lower levels in comparison to ionised carboxy groups.

When the hydrophilic polyester mainly contains SSIPa as the monomer for providing the ionised sulphonate groups, the amount of this monomer used in the polyester synthesis, based on the weight of all the monomers used in the polyester  
30 synthesis, will usually be within the range from 5 to 20% by weight. The acid value of the hydrophilic polyester which contains mainly ionised sulphonate groups will generally be within the range of from 0 to 100 mgKOH/g, more preferably 0 to 50 mgKOH/g, especially 0 to 25 mgKOH/g, more especially 0 to 10mgKOH/g.

When the hydrophilic polyester predominantly contains ionised carboxy water-dispersing groups, the acid value of the polyester is preferably within the range of from 20  
35 to 140 mgKOH/g more preferably 30 to 100 mgKOH/g.

Monomers having two or more functional groups which will readily undergo an ester condensation reaction and having non-ionic water-dispersing groups include

mono-, di- or higher functional hydroxy compounds containing polyoxyethylene groups, for example polyethylene glycols and alkyl ethers of polyethylene glycols.

Monomers having two or more functional groups which will readily undergo an ester condensation reaction and are free from ionic and non-ionic water-dispersing groups include polybasic carboxylic acids and polyols in which the carboxylic acid groups and hydroxy groups are esterified during the polymerisation process. For example, aliphatic, alicyclic and aromatic compounds having two or more carboxy groups and their ester forming derivatives (e.g. esters, anhydrides and acid chlorides) may be used. Specific examples include adipic acid, fumaric acid, maleic acid, succinic acid, itaconic acid, sebacic acid, nonanedioic acid, decanedioic acid, 1,4-cyclohexanedicarboxylic acid, 1,3-cyclohexanedicarboxylic acid, 1,2-cyclohexanedicarboxylic acid, terephthalic acid, isophthalic acid, phthalic acid and tetrahydrophthalic acid and their acid chlorides. Anhydrides include succinic, maleic, phthalic and hexahydrophthalic anhydrides.

Preferred polyols which can be used to form the polyester include those having from 2 to 6, more preferably 2 to 4 and especially 2 hydroxyl groups per molecule. Suitable polyols having two hydroxy groups per molecule include diols such as 1,2-ethanediol, 1,3-propanediol, 1,4-butanediol, 1,6-hexanediol, 2,2-dimethyl-1,3-propanediol (neopentyl glycol), the 1,2-, 1,3- and 1,4-cyclohexanediols and the corresponding cyclohexane dimethanols, diethylene glycol, dipropylene glycol, and diols such as alkoxylated bisphenol-A products, e.g. ethoxylated or propoxylated bisphenol A. Suitable polyols having three hydroxy groups per molecule include triols such as trimethylolpropane (1,1,1-tris (hydroxymethyl)ethane). Suitable polyols having four or more hydroxy groups per molecule include pentaerythritol (2,2-bis(hydroxymethyl)-1,3-propanediol) and sorbitol (1,2,3,4,5,6-hexahydroxyhexane).

Preferably component (b) readily disperses in component (d). On dispersion the particle size of component (b) is preferably such that when present in the composition it has a particle size from 20 to 500nm, more preferably from 20 to 350nm, especially from 20 to 200nm. Particle size can be measured by, for example, laser light scattering electron microscopy.

Component (b) is preferably an hydrophobic acrylic or polyurethane polymer of Mn more than 40,000. The hydrophobic polymer is preferably prepared by the methods described above for the hydrophilic polymers, except that the ionic and non-ionic water-dispersing groups are omitted or are present in low amounts. Component (b) is preferably hydrophobic by virtue of being free from or having low levels of ionic and/or non-ionic water-dispersing groups. The hydrophobic polymer is preferably prepared by polymerising one or more monomers which are free from or having low levels of ionic and/or non-ionic water-dispersing groups. The level of monomers having water-dispersing groups is preferably from 0 to 25% by weight of the hydrophobic polymer.

Although the hydrophobic polymer has only a low solubility in pure water, it is preferably chosen such that it does not precipitate out when in the composition of the invention.

When component (b) is a hydrophobic acrylic polymer the preferred acid value is from 0 to 30 mgKOH/g.

5        The Tg of the hydrophobic acrylic polymer is preferably in the range of from -10°C to 120°C, more preferably in the range of from 20°C to 110°C.

Preferably the hydrophobic acrylic polymer is a copolymer comprising styrene.

10        When component (b) is a hydrophobic polyurethane polymer, the hydrophobic polyurethane polymer can optionally be prepared by chain extending an isocyanate terminated polyurethane prepolymer, using techniques well known in the art. Suitable chain extenders include polyols, amine alcohols, diamines, hydrazines, substituted hydrazines and water. When the chain extender is other than water, for example a diamine, it may be added to an aqueous dispersion of the polyurethane prepolymer or may already be present in the aqueous medium when the polyurethane prepolymer is  
15        dispersed therein. The hydrophobic polyurethane polymer may be linear, branched or crosslinked.

Component (a) and component (b) are optionally based on the same or different polymers. For example component (a) may be a hydrophilic polyurethane and component (b) a hydrophobic polyurethane or component (a) may be a hydrophilic polyurethane and  
20        component (b) may be a hydrophobic acrylic polymer, in each case having the Mn as specified above.

Components (a) and (b) optionally each comprise a mixture of polymers. For example component (a) may comprise a mixture of hydrophilic acrylic polymers or a mixture of a hydrophilic acrylic polymer and a hydrophilic polyurethane polymer.

25        In a preferred embodiment the polymers used as component (a) and component (b) in the composition of the invention are each independently selected from acrylic polymers and polyurethane polymers.

Components (a) and (b) are purified if desired in the usual way for colorants used in ink-jet printing inks, for example by ion-exchange, filtration, reverse osmosis, dialysis,  
30        ultra-filtration or a combination thereof. In this way one may remove co-solvents used for the polymerisation, low molecular weight salts, impurities and free monomers.

Components (a) and (b) can be combined in a number of ways. For example, components (a) and (b) can be prepared separately, followed by combination by simple blending. Alternatively, when component (a) is an acrylic polymer, components (a) and  
35        (b) can be combined by preparing component (b) by *in-situ* aqueous emulsion in the presence of component (a). When component (b) is an acrylic polymer, components (a) and (b) can be combined by preparing component (a) by an *in-situ* aqueous emulsion polymerisation in the presence of component (b).



For example when component (b) is a hydrophobic acrylic polymer, the hydrophobic acrylic polymer may be prepared by aqueous polymerisation using component (a) (hydrophilic acrylic, polyurethane and/or polyester polymer) as a polymeric dispersant. Optionally additional surfactant may be used to aid dispersion. Preferably the aqueous polymerisation is carried out at a pH above 7.

Alternatively when component (b) is a hydrophobic acrylic polymer the hydrophobic acrylic polymer may be prepared by emulsion polymerisation at a low pH followed by *in-situ* polymerisation of a hydrophilic acrylic polymer component (a) at a low pH, with subsequent neutralisation with a base to pH 7.

The weight ratio of component (a) to component (b) is preferably from 5:95 to 99:1, more preferably from 5:95 to 95:5, especially from 5:95 to 50:50, more especially from 5:95 to 40:60, most especially of from 10:90 to 40:60.

In a preferred embodiment the weight ratio of component (a) to component (b) is from 99:1 to 50:50, preferably from 99:1 to 60:40, more preferably 99:5 to 60:40. This embodiment is preferred because compositions containing these ratios of components (a) to (b) perform particularly well in thermal ink-jet printers. Inks prepared from these compositions are stable, and prints prepared using the inks give a good performance in terms of wet rubfastness and highlighter smear resistance

The pigment (component (c)) is preferably a water-insoluble colorant, preferably inorganic or organic. Preferred inorganic pigments include carbon black, titanium dioxide, zinc oxide, zirconium oxide, chromium oxide, iron oxide and combinations thereof.

Preferred organic pigments include phthalocyanine, anthraquinone, perinone, indigoid, perylene, azo, carbon black pigments carrying ionic groups, azomethine, condensed ring pigments and pigments as mentioned in the Colour Index International, Third Edition (1982) Pigments and Solvent dyes, pages 10 to 143, which are incorporated herein by reference thereto. Preferred organic pigments are yellows, reds, oranges, violets, blue and / or black.

The carbon black pigment optionally carries water-dispersing groups, especially ionic groups, for example anionic and/or cationic groups. The anionic groups preferably comprise a carboxylic, sulphonic or phosphonic acid group. The cationic groups preferably comprise a quaternary ammonium group. Carbon black pigments carrying ionic groups are commercially available from a number of sources, including Mitsubishi and Cabot corporation for example the Cabojet (Cabojet is a Trade Mark of Cabot) range of carbon black pigments. Particularly preferred is carbon black pigment having a mean particle size of from 5 to 100 nm, more preferably of from 10 to 30 nm. The carbon black pigment preferably has a pH of from 3 to 9.

The pigment used in the composition of the present invention is optionally a mixture comprising of two or more pigments. Pigments are present in any effective

amount in the composition, typically from about 1 to about 10 percent by weight of the composition.

The liquid medium (component (d)) preferably comprises water and an organic solvent. The organic solvent preferably comprises a water-miscible organic solvent and/or a water-immiscible organic solvent.

Suitable water-miscible organic solvents include methanol, ethanol, n-propanol, isopropanol, n-butanol, sec-butanol, tert-butanol, isobutanol, dimethylformamide, dimethylacetamide, acetone, diacetone alcohol, tetrahydrofuran, dioxane, ethylene glycol, propylene glycol, butylene glycol, pentylene glycol, hexylene glycol, diethylene glycol, thiodiglycol, polyethylene glycol, polypropylene glycol, glycerol, 1,2,6-hexanetriol, 2-methoxyethanol, 2-(2-methoxyethoxy)ethanol, 2-(2-ethoxyethoxy) ethanol, 2-(2-butoxyethoxy)ethanol, 3-butoxypropan-1-ol, 2-[2-(2-methoxyethoxy)-ethoxy]ethanol, 2-[2-(2-ethoxyethoxy)ethoxy]-ethanol, optionally substituted pyrrolidones, sulpholane and mixtures containing two or more of the aforementioned water-miscible organic solvents. Preferred water-miscible organic solvents are tetrahydrofuran, dioxane, ethylene glycol, propylene glycol, butylene glycol, pentylene glycol, hexylene glycol, optionally substituted pyrrolidones, and sulpholane.

Suitable water-immiscible organic solvents include toluene, xylene, naphthalene, tetrahydronaphthalene, methyl naphthalene, chlorobenzene, fluorobenzene, chloronaphthalene, bromonaphthalene, butyl acetate, ethyl acetate, methyl benzoate, ethyl benzoate, benzyl benzoate, butyl benzoate, phenylethyl acetate, butyl lactate, benzyl lactate, diethyleneglycol dipropionate, dimethyl phthalate, diethyl phthalate, dibutyl phthalate, di (2-ethylhexyl) phthalate, hexanol, octanol, benzyl alcohol, phenyl ethanol, phenoxy ethanol, phenoxy propanol, phenoxy butanol, anisole, phenetole, nitrocellulose, cellulose ether, cellulose acetate, low odour petroleum distillates, turpentine, white spirits, naphtha, isopropylbiphenyl, terpene, vegetable oil, mineral oil, essential oil, natural oil, C<sub>8</sub>-C<sub>12</sub> substituted pyrrolidones and mixtures of any two or more thereof. Benzyl alcohol is especially preferred.

The weight ratio of water-miscible organic solvent to water-immiscible organic solvent in the composition is preferably 19:1 to 1:1, more preferably 8:1 to 1:1, especially 5:1 to 1:1.

The compositions according to the present invention may be prepared by combining components (a), (b), (c) and (d) in any order. Suitable combining techniques are well known in the art, for example agitation, grinding, milling, ultrasonication or stirring of all the components. Preferably the composition is prepared by mixing components (a), (b), and (d) and optionally further components until the composition is homogenous. The mixture may then be added slowly with stirring to component (c) before adjusting the pH by addition of a base. Components (a), (b), (c) and (d) are preferably combined together

under conditions which retain stability and avoid flocculation. The preferred pH range of the composition is of from 7 to 11, more preferably of from 9 to 10.

Preferably the composition comprises:

(i) from 0.1 to 10 parts, more preferably 1 to 5 parts, especially 2 to 4 parts of component (a);

(ii) from 0.1 to 10 parts, more preferably 1 to 10 parts, especially 2 to 9 parts, more especially 4 to 7 parts, of component (b);

(iii) from 0.1 to 15 parts, more preferably 2 to 10 parts, especially 4 to 8 parts of component (c); and

(iv) from 75 to 98 parts, more preferably 75 to 90 parts, especially 80 to 90 parts of component (d);

wherein all the parts are by weight and the parts by weight of (i) + (ii) + (iii) + (iv) add up to 100.

In addition to components (a), (b), (c) and (d), the composition optionally contains other components, such as a biocide, for example Proxel GXL (Proxel is a trade mark of Avecia Limited, formerly Zeneca Limited) or Kathon (Kathon is a trade mark of Rohm and Haas), a fungicide, a rheological agent, e.g. a wax (e.g. beeswax), a clay (e.g. bentonite), an IR absorber, or a fluorescent brightener, for example C.I. Fluorescent Brightener 179 and/or UV absorber, for example hydroxy phenylbenzotriazole. Furthermore the compositions optionally contain a surface active agent, wetting agent and/or an emulsifier, for example those described in McCutcheon's Emulsifiers and Detergents 1996 International Edition or in Surfactants Europa 3<sup>rd</sup> Edition 1996 each of which is incorporated herein by reference.

Preferably the composition is an ink, more preferably an ink suitable for use in an ink-jet printer.

The viscosity of the composition is preferably less than 100cp, more preferably less than 50cp, especially less than 20cp and more especially less than 15cp, at 20°C.

Preferably the composition has been filtered through a filter having a mean pore size below 10  $\mu\text{m}$ , preferably below 5  $\mu\text{m}$ , more preferably below 2  $\mu\text{m}$ , especially below 0.45  $\mu\text{m}$ . In this way particulate matter is removed which could otherwise block fine nozzles in an ink-jet printer.

The compositions according to the invention have the advantage that they are suitable not only for the use in piezoelectric ink-jet printers but also in thermal and continuous ink-jet printers. Such compositions form discrete droplets on the substrate with little tendency for diffusing. Consequently sharp images with excellent print quality and little if any bleed between colours printed side by side can be obtained. Furthermore the compositions show good storage stability, wet and light fastness and fastness to both acidic and alkaline highlighter pens.

A third aspect of the invention provides a process for printing an image on a substrate comprising applying thereto a composition according to the invention by means of an ink-jet printer.

The ink-jet printer preferably applies the composition to the substrate in the form of droplets which are ejected through a small nozzle onto the substrate. Preferred ink-jet printers are piezoelectric ink-jet printers and thermal ink-jet printers. In thermal ink-jet printers, programmed pulses of heat are applied to the compositions in a reservoir by means of a resistor adjacent to the nozzle, thereby causing the compositions to be ejected in the form of small droplets directed towards the substrate during relative movement between the substrate and the nozzle. In piezoelectric ink-jet printers the oscillation of a small crystal causes ejection of the compositions from the nozzle.

The substrate is preferably a paper, plastic, or textile material, more preferably a paper, an overhead projector slide or a textile material, especially paper.

Preferred papers are plain, coated or treated papers which may have an acid, alkaline or neutral character. Most preferably the substrate is a coated paper.

According to a further feature of the invention there is provided an ink-jet printer cartridge, optionally refillable, containing a composition as hereinbefore defined.

The invention will now be described by example only. All parts and percentages are by weight unless specified otherwise.

#### Preparation of Polymer Composition 1

Polymer Composition 1 comprises components (a) and (b) where component (b) is prepared by an in-situ emulsion polymerisation in the presence of component (a) where the ratio of component (a) to component (b) is 35:65.

#### Stage 1 - Preparation of component (a):

Component (a) is a hydrophilic acrylic copolymer of Mn less than 30,000, with a composition of MAA/MMA/BA (10/69.5/20.5), prepared by an emulsion polymerisation using components as listed below in Table 1:

Table 1

	Materials	Weight (g)	Percentage
	De-ionised Water	436.5	32.82
<u>monomer shot</u>	Methyl methacrylate	25.9	1.9
	Butyl acrylate	7.6	0.6
	3 Mercaptopropionic acid	1.1	0.08
<u>monomer feed</u>	Methacrylic acid (MAA)	37.4	2.8
	Methyl methacrylate (MMA)	233.7	17.6
	Butyl acrylate (BA)	68.8	5.2
	3-Mercaptopropionic acid	10.0	0.7
<u>initiator shot</u>	Ammonium persulphate	0.4	0.03
	De-ionised water	12.0	0.9
	Sodium lauryl sulphate	0.6	0.04
<u>initiator feed</u>	Ammonium persulphate	3.3	0.25
	De-ionised water	108.5	8.16
	Sodium lauryl sulphate	5.0	0.4
<u>burn-up</u>	Ascorbic acid	2.24	0.17
<u>co-initiator</u>	De-ionised water	42.58	3.20
<u>burn-up</u>	t-Butyl hydrogen peroxide	3.20	0.24
<u>initiator</u>	De-ionised water	41.62	3.13
<u>odour reducer</u>	Hydrogen peroxide solution 30%	2.49	0.19
	De-ionised water to take up to 30% solids	2.50	18.50
<u>neutralisation</u>	Ammonia solution 20%	36.91	2.78

Water was added to a reactor and heated to 80°C with continuous stirring. The  
 5 reactor was purged with N<sub>2</sub>.

The monomer shot was added to the reactor and stirred for 5 minutes. The initiator shot was added to seed the reaction and stirred for 15 minutes. Monomer and initiator feeds were then added over 90 minutes whilst maintaining the temperature at 80-83°C for a further hour.

Subsequently the emulsion was cooled to 50°C to commence burn-up by adding the burn-up co-initiator dropwise over 30 minutes. The burn-up initiator was added in 3 equal shots at 1, 10 and 20 minutes of the burn-up co-initiator addition.

The mixture was stirred for 30 minutes before adding the hydrogen peroxide solution dropwise over 10 minutes. De-ionised water was added to take the emulsion to 30% solids w/w and the temperature increased to 60°C.

The emulsion was then neutralised with ammonia solution and stirred until the solution had gone clear. The resultant hydrophilic polymer was cooled and filtered through a 50µm mesh.

#### Analysis

The resultant hydrophilic polymer solution (component (a)) had a pH of 7.0, a weight average molecular weight of 13289 and an Mn of 5,446. The Tg average was 66°C.

#### Stage 2 - Preparation of component (b):

Component (b) is a hydrophobic acrylic homopolymer of Mn more than 40,000, comprising styrene. Preparation of component (b) is carried out by an *in-situ* emulsion polymerisation of the components as listed in Table 2 below, in the presence of component (a) as prepared in stage 1 above.

Table 2

	Materials	Weight (g)	Percentage
<u>initial charge</u>	Product from stage 1.	386.68	34.40
	De-ionised water	379.77	33.79
	Ammonia solution 35%	10.0	0.89
<u>emulsified feed</u>	Styrene	217.74	19.37
	De-ionised water	108.88	9.69
	Ammonium persulphate	1.09	0.1
	Sodium lauryl sulphate	1.09	0.1
	De-ionised water for rinse	18.75	1.69

The initial charge was added to a reactor with enough ammonia solution to ensure that the pH of the initial charge was greater than 8.5, and heated to 80-85°C with continuous stirring under nitrogen.

10% of the emulsified feed was added to the reactor from a dropping funnel and left to nucleate for about 5 minutes. After nucleation the remainder of the emulsified feed was added over an hour while the temperature of  $85 \pm 2^\circ\text{C}$  was maintained. Once all the feed was added the dropping funnel was rinsed with de-ionised water which was subsequently added to the reactor. The reaction was left for a further 30 minutes at 85°C before cooling the resultant composition to room temperature and filtering the composition through a 50µm mesh.

The resultant Polymer Composition 1 was made up to 30 % solids w/w with deionised water, had a pH of 8.8, a particle size of 38 nm and the Mn of component (b) was 214,000.

#### Preparation of Polymer Composition 2

Polymer Composition 2 comprises a blend of component (a) with component (b) where the ratio of component (a) to component (b) is 42:58.

#### Stage 1 - Preparation of component (a):

Component (a) is a hydrophilic acrylic copolymer of Mn less than 30,000, with a composition of MAA/MMA (10/90) prepared by an emulsion polymerisation.

The method described above for the preparation of polymer composition 1, stage 1 was repeated except that the monomer shot and monomer feed were as described in Table 3 below.

Table 3

	Materials	<u>weight (g)</u>
<u>monomer shot</u>	methyl methacrylate	33.7
	3-mercaptopropionic acid	1.1
<u>monomer feed</u>	methacrylic acid	37.4
	methyl methacrylate	302.9
	3-mercaptopropionic acid	10.0

Analysis

The resultant hydrophilic polymer solution had a solids content of 30% solids w/w, a pH of 7.0 and a Mn of 5541.

5 Stage 2 - Preparation of component (b):

Component (b) is a hydrophobic acrylic copolymer of Mn more than 40,000, with a composition of SY/AA (96/4) prepared by an emulsion polymerisation, with components as listed in Table 4 below.

Table 4

10

	Materials	Weight (g)	Percentage
<u>monomer shot</u>	De-ionised water	442.2	33.95
	Styrene	48	3.7
	Acrylic acid	2	0.15
<u>monomer feed</u>	Styrene	432	33.2
	Acrylic acid	18	1.4
<u>initiator shot</u>	Ammonium persulphate	0.25	0.02
	Sodium lauryl sulphate	1.0	0.08
	De-ionised water	13.1	1.0
<u>initiator feed</u>	Ammonium persulphate	2.25	0.17
	Sodium lauryl sulphate	9.0	0.7
	De-ionised water	117.8	9.0
<u>burn-up co-initiator</u>	Ascorbic acid	1.5	0.12
	De-ionised water	28.5	2.19
<u>burn-up initiator</u>	t-Butyl hydrogen peroxide	2.14	0.16
	De-ionised water	27.86	2.14
<u>neutralisation</u>	De-ionised water	143.37	11.01
	Ammonia solution 35%	13.5	1.04



Water was added to a reactor and heated to 80°C with continuous stirring. The reactor was purged with N<sub>2</sub>.

The monomer shot was added to the reactor and stirred for 5 minutes. The initiator shot was added to seed the reaction and stirred for 15 minutes. Monomer and initiator feeds were then added over 90 minutes whilst maintaining the temperature at 80-83°C for a further hour.

Subsequently the emulsion was cooled to 50°C to commence burn-up by adding the burn-up co-initiator dropwise over 30 minutes. The burn-up initiator was added in 3 equal shots at 1, 10 and 20 minutes of the burn-up co-initiator addition.

The mixture was stirred for 30 minutes before adding the hydrogen peroxide solution dropwise over 10 minutes. De-ionised water was added to take the emulsion to 30% solids w/w and the temperature increased to 60°C.

The emulsion was then neutralised with ammonia solution and stirred until the mixture had gone clear. The resultant hydrophobic polymer was cooled and filtered through a 50µm mesh.

#### Analysis

The resultant hydrophobic polymer emulsion had a pH of 9.6, an average particle size of 94 nm, and an Mn of 80,195.

#### Stage 3 - Preparation of a blend of components (a) and (b)

Component (a) from stage 1 (28g) was added to component (b) from stage 2 (39g), mixed thoroughly and de-ionised water was added to take the emulsion to 30% solids w/w to give Polymer Composition 2.

#### Preparation of Polymer Compositions 3, 4 & 5

Polymer Compositions 3, 4 & 5 comprise blends of component (a) with component (b) where for:

Polymer Composition 3 the ratio of component (a) to component (b) is 90:10, for Polymer Composition 4 the ratio of component (a) to component (b) is 80:20, and for Polymer Composition 5 the ratio of component (a) to component (b) is 70:30.

#### Stage 1 - Preparation of component (a)

Component (a) is a hydrophilic polyurethane polymer of Mn less than 30,000 with components as listed below in Table 5.

Table 5

	Materials	Weight (g)
1.	Dimethylol propionic acid (DMPA)	6
2.	1,4-Cyclohexane dimethanol (CHDM)	5.25
3.	Polypropylene glycol 1000 (PPG)	27.5
4.	Isophorone diisocyanate (IPDI)	36.2
5.	Dibutyl tin dilaurate	0.08
6.	N-methyl-2-pyrrolidinone (NMP)	18.7
7.	Jeffamine M1000	112
8.	Ammonia (35% solution)	1.4
9.	De-ionised water	546

Procedure

Materials 1, 2, 3, and 4 were added to a reactor and stirred under N<sub>2</sub>. Material 5 was added to the reactor and heated to 50°C with continuous stirring under N<sub>2</sub>. Dibutyl tin dilaurate was added to the reactor and heated to 90°C for three hours before removing a sample for isocyanate content determination. This was repeated until the isocyanate content (NCO) had reached 4.66%, after which Jeffamine M1000 is added to the reactor and stirred for one hour at 90°C. The reaction mixture is dispersed into a mixture of ammonia (35%) and de-ionised water and stirred for one hour at room temperature, before filtering the dispersion through a 50µm mesh. Further de-ionised water was added to take the emulsion to 10% solids w/w.

Analysis: The resultant hydrophilic polymer emulsion (component (a)) had a pH of 8.8, a weight average molecular weight of 7189, an Mn of 4621 and a viscosity at 10% solids w/w of 2.56 cps.

Stage 2 - component (b):

Component (b) is a commercially available polyurethane dispersion R985 NeoRez, available from NeoResins, Avecia b.v. with a Mn > 50,000, which was combined with de-ionised water to take the dispersion to 10% solids w/w. (NeoRez is a Trade Mark of Avecia B.V).

Stage 3 - Preparation of blends of components (a) and (b):

Component (a) from stage 1 and component (b) from stage 2 were mixed thoroughly to give three blends, each having a solids content of 10% solids w/w.

The quantities of components (a) and (b) used for each blend are listed below in Table 6.

Table 6

Polymer Composition	component (a) from stage 1	wt component (b) from stage 2	ratio (a):(b)
3	90 g	10 g	90:10
4	80 g	20 g	80:20
5	70 g	30 g	70:30

Preparation of Inks:5 Example 1 and Example 2:

Components as listed below in Table 7 where mixed until homogeneous.

Comparative Examples 1, 2 and 3:

10 Comparative Examples 1,2 and 3 comprising components as listed below in Table 7 where mixed until homogeneous.

Comparative Example 1 contains no polymer component, Comparative Example 2 only contains component (a) from Polymer Composition 2, and Comparative Example 3 only contains component (b) from Polymer Composition 2.

15 The resultant inks were adjusted to approximately pH 9.5 using 35% ammonia solution, and subsequently filtered through a 10 $\mu$ m mesh.

Table 7

Components (%)	Examples		Comparative Examples		
	1	2	1	2	3
Cabojet 300 <sup>x</sup>	26	26	26	26	26
Diethylene glycol	10	10	10	10	10
Urea	5	5	5	5	5
Butyl Digol	2	2	2	2	2
Surfynol 465	0.1	0.1	0.1	0.1	0.1
Polymer Composition 1	33.3	-	-	-	-
Polymer Composition 2	-	33.2	-	-	-
component (a) only <sup>#</sup>	-	-	-	33.3	-
component (b) only <sup>#</sup>	-	-	-	-	33.3
De-ionised water	23.6	23.6	23.6	23.6	23.6
x = Cabojet 300 is at 15.3% solids w/w in de-ionised water					
# = from Polymer Composition 2					

Example 3, 4 and 5

The components listed below in Table 8 were mixed until homogeneous, and then the pH was adjusted to approximately 9.5 by the addition of 2-amino-2-methyl propanol, and subsequently filtered through a 0.45 µm mesh.

Comparative Examples 4 and 5:

Comparative Examples 4 and 5 were prepared as described above for Example 3, where Comparative Example 4 only contains component (a) from Polymer Composition 3 and Comparative Example 5 only contains component (b) from Polymer Composition 3.

Table 8

Components (%)	Examples			Comparative Examples	
	3	4	5	4	5
Cabot Carbon IJX157B	4.5	4.5	4.5	4.5	4.5
Polymer Composition 3	9.0	-	-	-	-
Polymer Composition 4	-	9.0	-	-	-
Polymer Composition 5	-	-	9.0	-	-
Component (a)*	-	-	-	9.0	-
Component (b)*	-	-	-	-	9.0
Diethylene glycol	10	10	10	10	10
Pentanediol	5.0	5.0	5.0	5.0	5.0
Proxel GXL (biocide - Avecia Ltd)	0.1	0.1	0.1	0.1	0.1
Surfynol 465 (surfactant - Air Products)	0.2	0.2	0.2	0.2	0.2
De-ionised water	71.2	71.2	71.2	71.2	71.2
* = from Polymer Composition 3					

Stage 2 - EvaluationEvaluation

The inks prepared in Examples 1 and 2, and Comparative Examples 1, 2 and 3 were fired from an Epson 600 piezo ink-jet printer onto Conqueror High White Wave 100g/m<sup>2</sup> plain paper from Arjo Wiggins Ltd.

The inks prepared in Examples 3, 4 and 5, and Comparative Examples 4 and 5 were fired from a Hewlet Packard HP690C thermal ink-jet printer onto Xerox 4024 DP paper. The resultant prints were evaluated for highlighter smear resistance, stability and wet rubfastness. The evaluation test results are shown below in Table 9.

Highlighter smear resistance

This is a test performed 5 minutes after printing.

A yellow highlighter pen was used to draw a horizontal line across a series of printed vertical bars. The amount of ink smear between the vertical bars was assessed visually against controls.

Wet rubfastness

This is a test performed 5 minutes after printing.

A finger was wetted and rubbed on the corner of a printed solid black block. The amount of ink transferred to white paper is assessed visually against controls.

Ink Stability

The ink resulting from stage 1 were stored in an incubator at a range of temperatures for one week. The temperature cycle was a 24 hour cycle (-10°C to 25°C).

The stability was evaluated by optical microscopy and the stability was ranked as follows:

Rank	Description
5	No change, good mobile dispersion
4	Good, a few 1 micron particles present, still mobile
3	An increase in the amount of particles greater than 1 micron
2	Large (greater than 2 micron) flocculates present, ink less mobile
1	Flocculated, immobile, unstable

Table 9  
Evaluation Test Results

Example	Polymer	Ink Stability data			Printed Ink Performance			
		Room temperature	60°C	70°C	Temperature cycle	wet rub fastness	highlighter smear	print quality
1	Polymer Composition 1	5	5	2	5	very little smear	no smear 100%	good
2	Polymer Composition 2	5	5	5	5	very little smear	no smear 100%	good
3	Polymer Composition 3	5	-	-	-	little smear	little smear	good
4	Polymer Composition 4	5	-	-	-	very little smear	very little smear	good
5	Polymer Composition 5	5	-	-	-	no smear	no smear	good
Comparative Example								
1	No polymers	5	5	5	5	smear	smear	very poor
2	Component (a) <sup>#</sup> only	1	1	1	1	did not print	did not print	did not print
3	Component (b) <sup>#</sup> only	5	5	5	5	did not print	did not print	did not print
4	Component (a) <sup>*</sup> only	5	-	-	-	smear	smear	good
5	Component (b) <sup>*</sup> only	5	-	-	-	did not print	did not print	very poor

Key: - = not measured

# = from polymer composition 2

\* = from polymer composition 3

CLAIMS

1. A composition comprising the components:

- 5 (a) a hydrophilic polymer having a number average molecular weight less than 30,000;
- (b) a hydrophobic polymer having a number average molecular weight more than 40,000;
- (c) pigment; and
- (d) liquid medium.
- 10

2. A composition according to claim 1 wherein component (a) has a number average molecular weight less than 20,000.

3. A composition according to claim 1 wherein component (b) has a number average molecular weight greater than 60,000.

15

4. A composition according to claim 1 wherein component (a) and component (b) are each independently selected from the group consisting of acrylic polymers, polyurethanes and polyesters.

20

5. A composition according to any one of the preceding claims wherein the hydrophobic polymer comprises a hydrophobic acrylic polymer and a polyurethane polymer.

6. An composition according to any one of the preceding claims wherein the hydrophilic polymer is hydrophilic by virtue of the presence of ionic and/or non-ionic water dispersing groups in the hydrophilic polymer.

25

7. A composition according to any one of the preceding claims having a viscosity less than 100cp at 20 °C.

30

8. A composition according to any one of the preceding claims which comprises:

(i) from 0.1 to 10 parts of component (a);

(ii) from 0.1 to 10 parts, more preferably 1 to 10 parts of component (b);

35 (iii) from 0.1 to 15 parts of component (c); and

(iv) from 75 to 98 parts of component (d)

wherein all the parts are by weight and the parts by weight of (i) + (ii) + (iii) + (iv) add up to 100.

9. A composition according to anyone of the preceding claims wherein the pigment is a carbon black pigment.

5 10. A composition according to claim 9 wherein the carbon black pigment carries ionic groups.

11. An ink comprising a composition according to any one of the preceding claims.

10 12. Use of a composition according to claims 1 to 10 as an ink for ink-jet printing.

13. A process for printing an image on a substrate comprising applying thereto composition according to any one of claims 1 to 10 by means of an ink-jet printer.

15 12. An ink-jet printer cartridge containing a composition according to any one of claims 1 to 10.





DC

PC 101 07/07/02

23/47 63d 12-2-2000

Avecia Limited